

SPECIFICATIONS

► Sonar

Swath Coverage	145° ⁽¹⁾
Number of RX Beams	512
TX Beam Width Along-Track	1.45° ⁽²⁾
RX Beam Width Across-Track	1°±0.1° ⁽³⁾
Range	0.2 - 200 m ⁽⁴⁾
Frequency	400 kHz/550 kHz
Ranging Resolution	< 10 mm
Beam Distribution	EA & ED
Ping Rate	50 Hz
Depth Rating	60 m
Real-Time Roll Stabilization	±10°

► Sound Velocity Surface

Sound Velocity Range	1375 m/s - 1625 m/s
Sound Velocity Accuracy	±0.025 m/s
Sound Velocity Resolution	0.001 m/s

► Physical

Weight (with bracket)	In air: 3.5 kg In water: 1.2 kg
Dimensions	161.5 mm × 111.5 mm × 179 mm
Power Consumption	50 W

► Performance

Calibration-Free Installation	Yes
Software Compatibility	Supports EasySail control & acquisition, CMS and CoSail post-processing Compatible with mainstream softwares (Beamworx, Hypack, QPS, EVIA, Caris, etc.)

* Specifications are subject to change without notice.

Notes:

- (1) Roll stab is limited to 130° swath.
- (2) This is the beamwidth at 550 kHz; the beamwidth at 400 kHz is 2°.
- (3) This is the beamwidth at 550 kHz; the beamwidth at 400 kHz is 1.3°.
- (4) Dependent on water temperature and salinity.

©2026 Shanghai Huace Navigation Technology Ltd. All rights reserved. The CHCNAV and CHCNAV logo are trademarks of Shanghai Huace Navigation Technology Limited. All other trademarks are the property of their respective owners. Revision April 2026.

CHC Navigation Headquarter

577 Songying Road, Qingpu,
201703 Shanghai, China
Marketing@chcnav.com
+86 21 54260273


CHC Navigation Europe Kft

Office Campus, Building A
1097 Budapest Gubacsi út 6/A., HUNGARY
Europe_office@chcnav.com
+36 20 510 6723



HN-400M

MULTIBEAM ECHOSOUNDER

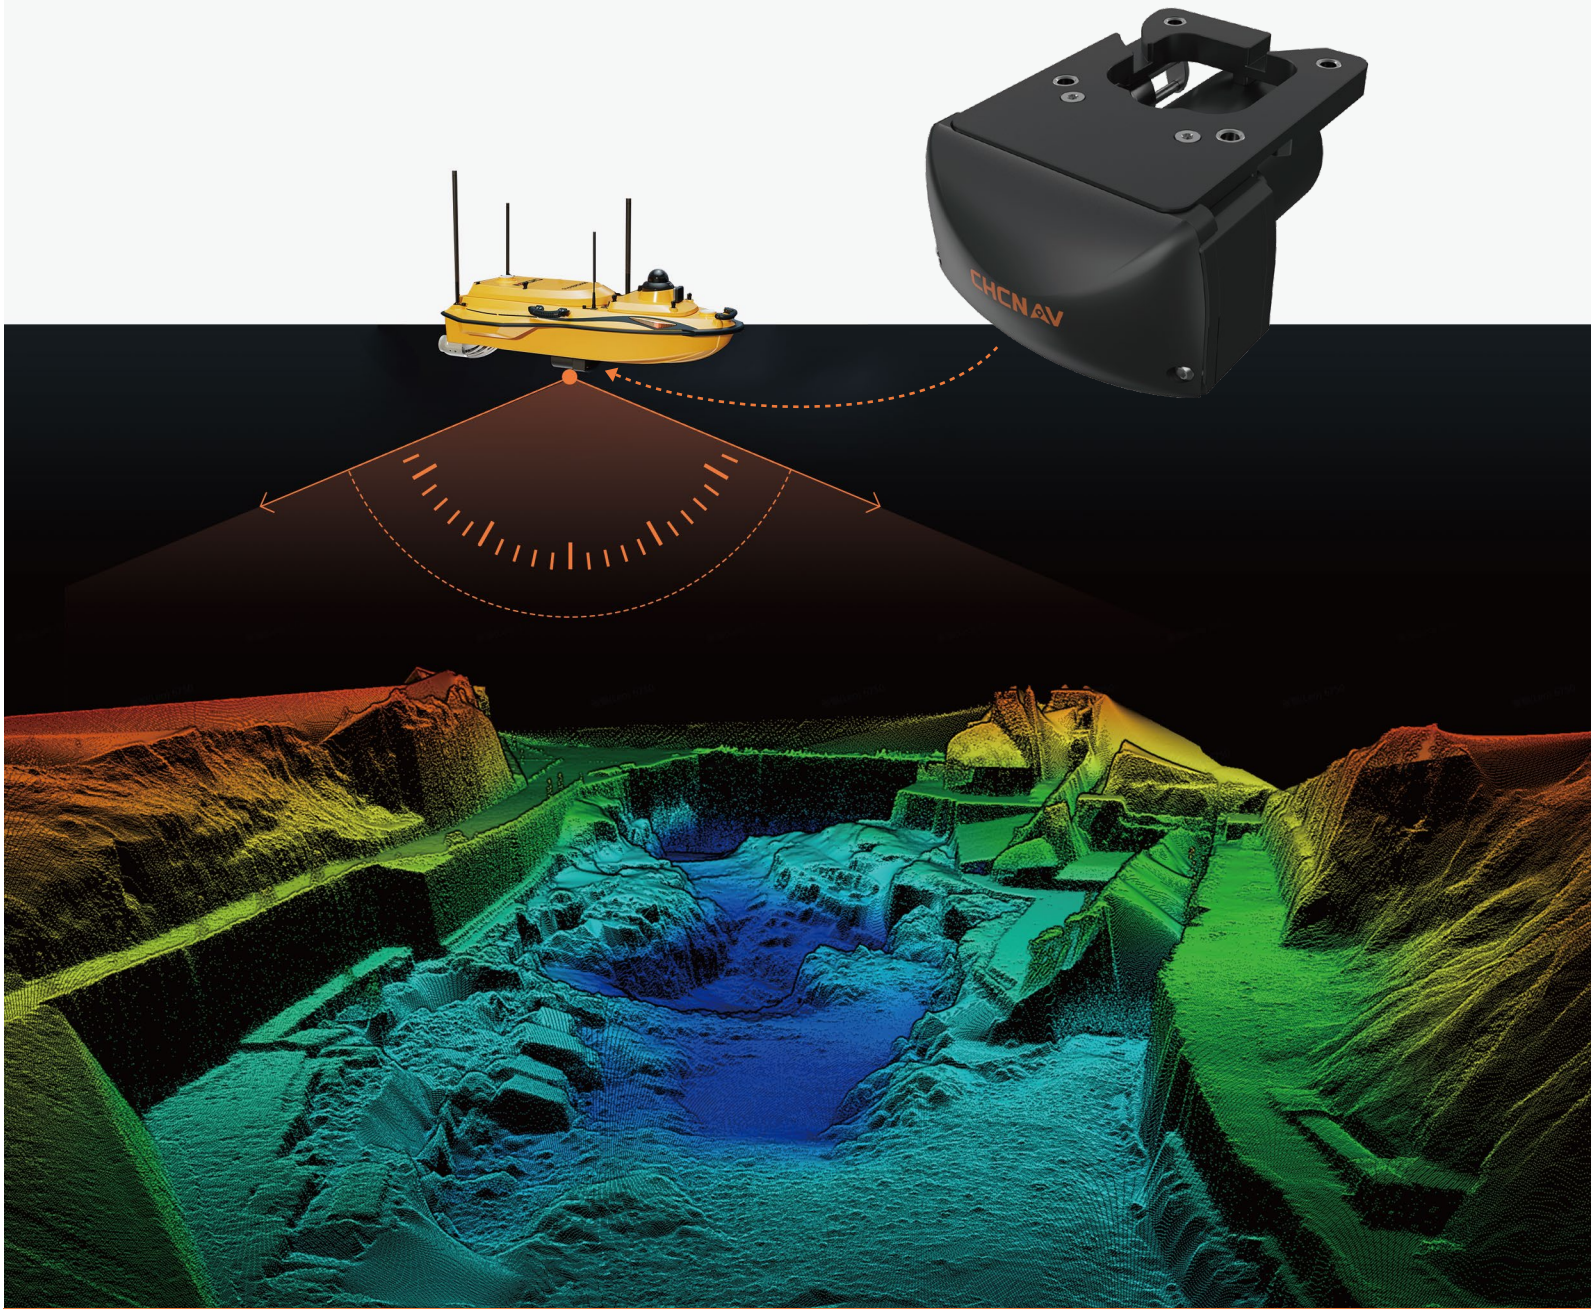

► Highlight

The CHCNAV HN-400M multibeam echosounder gives hydrographic professionals a smarter, more reliable way to survey challenging waters. Built for conditions where turbidity, depth variation, and vessel motion can affect data quality, it combines intelligent dual-frequency operation, high-precision INS-based stabilization, and a lightweight integrated design. From nearshore mapping and underwater inspection to channel dredging and inland waterway surveys, the HN-400M delivers high-quality bathymetric data with faster mobilization and dependable performance.



► Broad Coverage and High-Precision Bathymetry




400 kHz / 550 kHz

400 kHz and 550 kHz dual-frequency operation



0.03°

0.03° roll and pitch accuracy

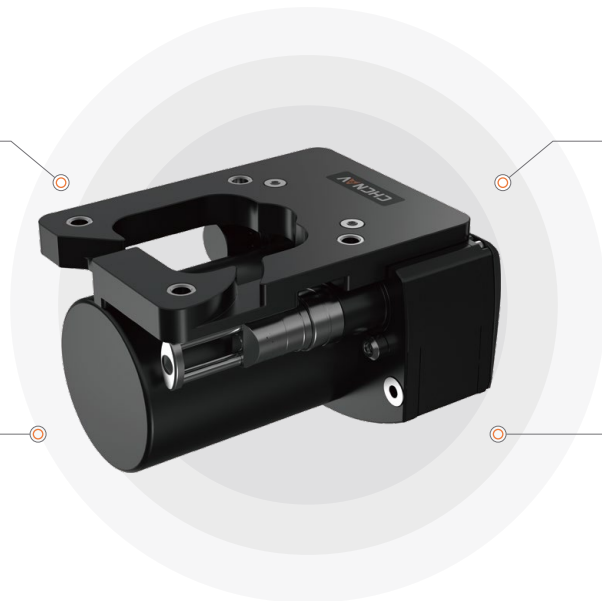

145°


145° wide swath coverage



3.5 kg

Weight of only 3.5 kg

► Dual-Frequency Adaptability

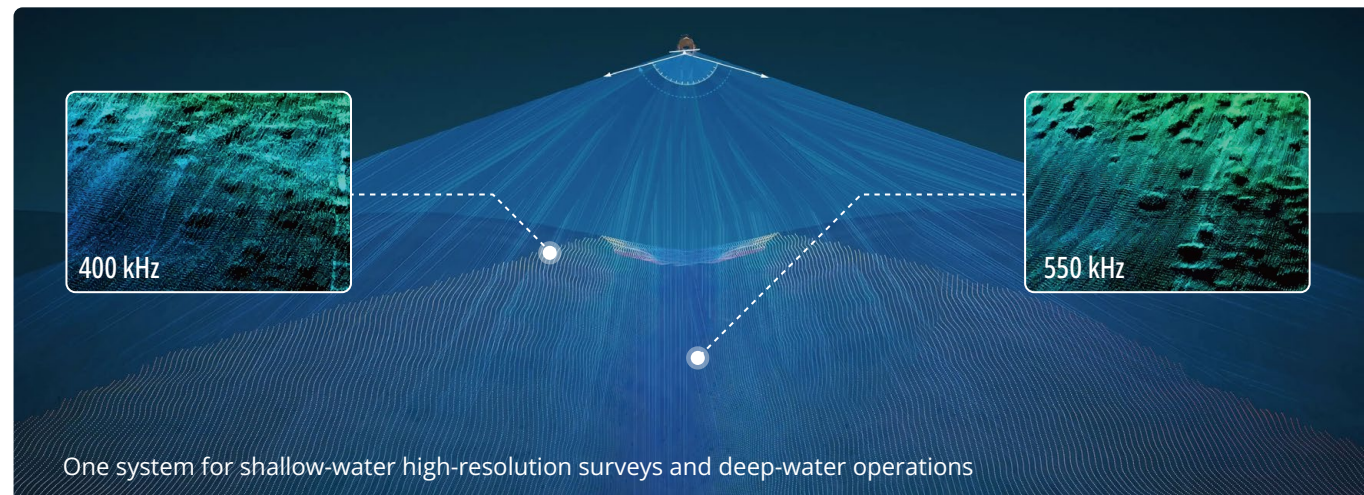

One system for shallow-water high-resolution surveys and deep-water operations


► High Precision and Efficiency

0.03° roll and pitch accuracy

High-precision IMU for motion compensation

145° swath coverage

Wide-swath sonar up to 6 times water depth

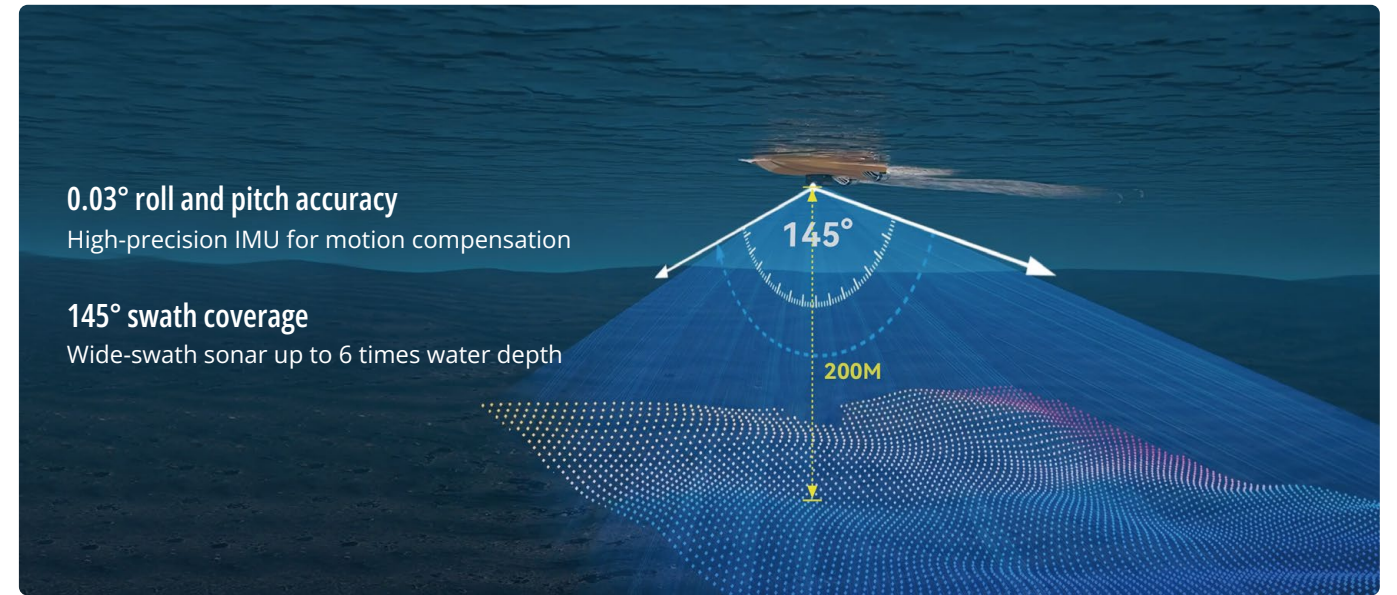

► Lightweight and Easy Deployment




3.5 kg total weight

Easy deployment on USVs and manned vessels
Calibration-free installation

EasySail Android App

Full field control in one touch

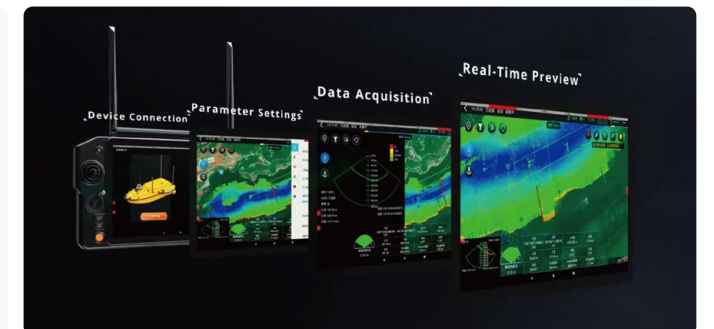

► Application



Channel dredging



Nearshore surveying



Reservoir capacity measurement



River and lake surveying